


# Copper Upcast Rods



# Copper Flats & Strips

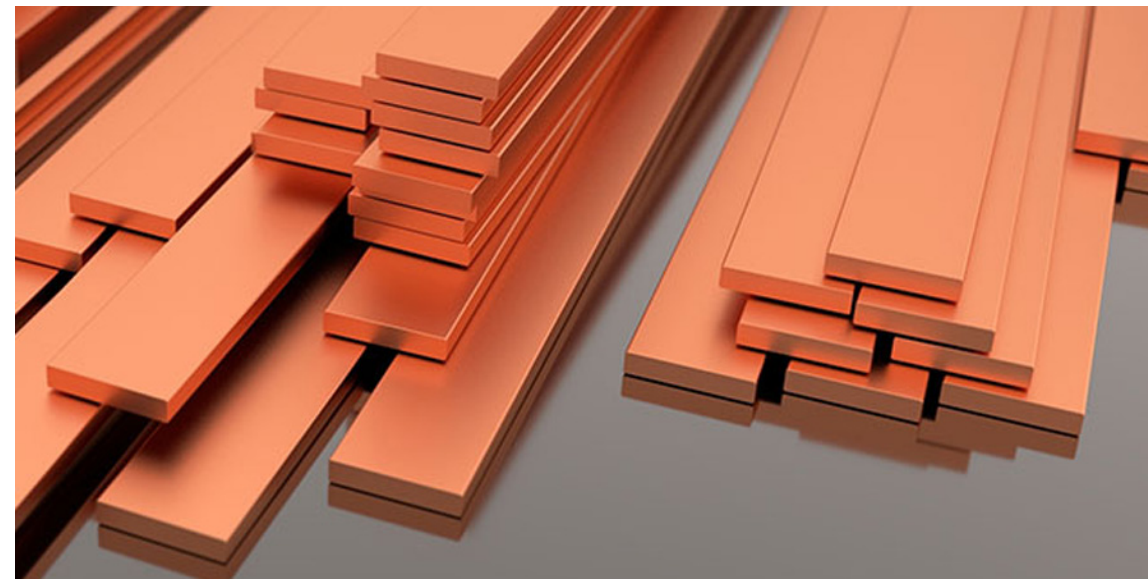

Copper Busbar & Strips  
OFC & ETP Grade

ITEM	OFC Grade	ETP Grade
<b>Dimension Details</b>	0 12.5 mm, 16 mm, 20 mm, 25 mm	0 12.5 mm, 16 mm, 20 mm, 25 mm
<b>Specifications</b>	Cu: 99.95%, O2 : <10 ppm	Cu: 99.90%, O2 : < 400 ppm
<b>Coil Weight</b>	1.5 to 3 MT	1.5 to 3 MT

ITEM	Width	Thickness
<b>Dimension Details</b>	10 mm - 50 mm 10 mm - 100 mm 10 mm - 150 mm 10 mm - 320 mm	1 mm - 25 mm 2 mm - 25 mm 3 mm - 25 mm 5 mm - 15 mm
<b>Standards</b>	IS: 191, 613 & 1897, BS EN 13601:2013	
<b>Electrical Conductivity (% IACS)</b>	Above 100% in soft , Above 98.5% min in Half Hard I Hard	
<b>Specifications (OFC)</b>	Copper : 99.95%, O2 :<10 ppm	
<b>Specifications (ETP)</b>	Copper : 99.90%, O2 :<400 ppm	
<b>Supply Condition</b>	Straight length & coils	
<b>Electro Plating</b>	Tin I Silver I Nickel, Plating Range - 6 micron to 20 micron	
<b>Packaging</b>	Cut to 1 to 4.5 meters length, Packed in Pallet I Wooden Box	



Do you need specific information about the product?


Domestic Enquires:  
+91 22 62694225 / 226  
info@leebogroup.com

International Enquires:  
+91 9324044383  
sales@omegamills.com

[www.leebogroup.com](http://www.leebogroup.com)

# Copper Flats & Strips


Copper Round/Hex/Square - ETP Grade

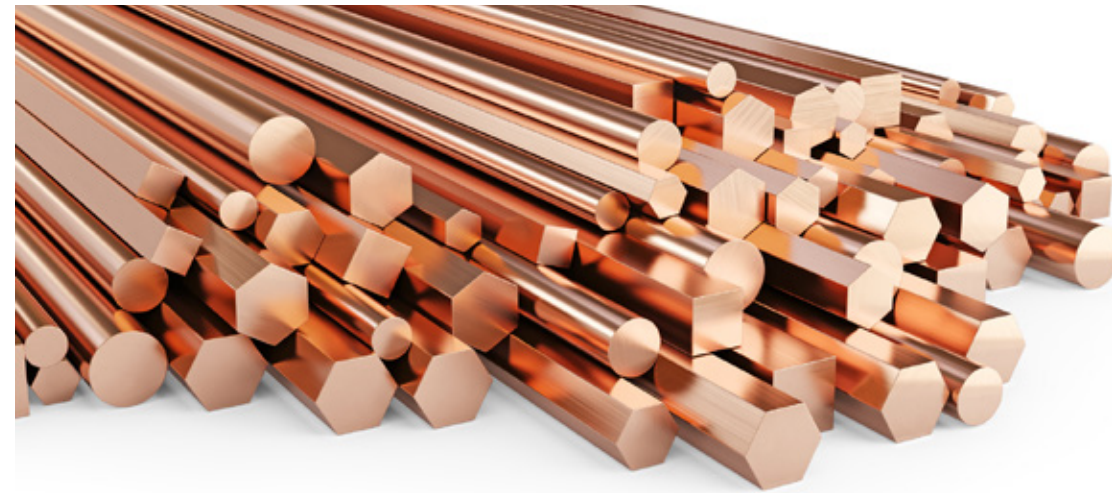

ITEM	Dimension Details
Round	0.7 mm - 120 mm
Square	10 x 10 mm - 90 x 90 mm
Hex	0.8 mm - 110 mm
Standards	IS: 191, 613 & 1897, BS EN 13601 : 2013
Electrical Conductivity (% IACS)	98.5% min
Specification	Copper : 99.90%, O2 : <400 ppm

# Copper Foils


Copper Foils - OFC & ETP Grade

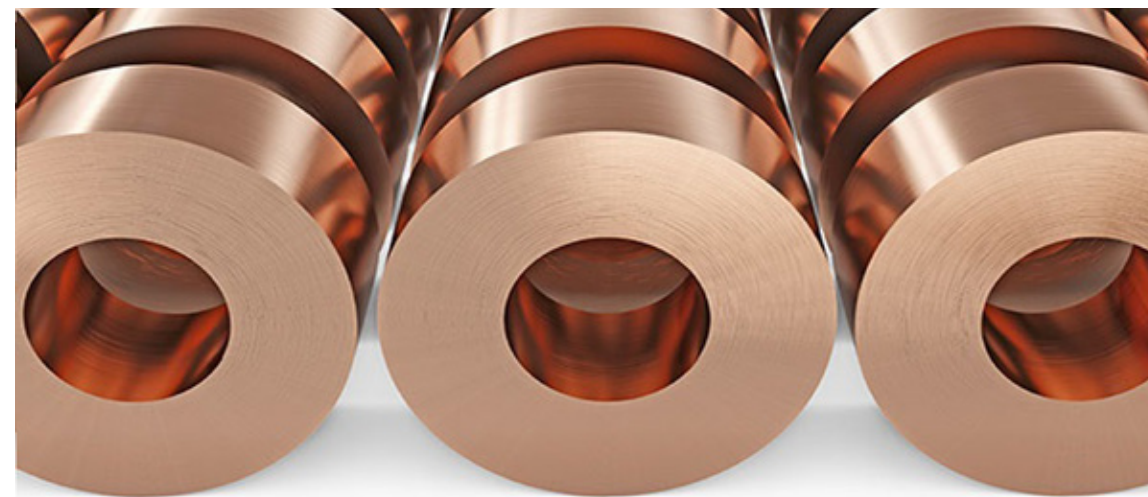

ITEM	WIDTH	THICKNESS
Dimension Details	10 mm - 320 mm	0.15 mm - 4.00 mm
Standards	IS 1897   IS 14811	

# Copper Sheets

Copper Sheets & Plates - ETP Grade

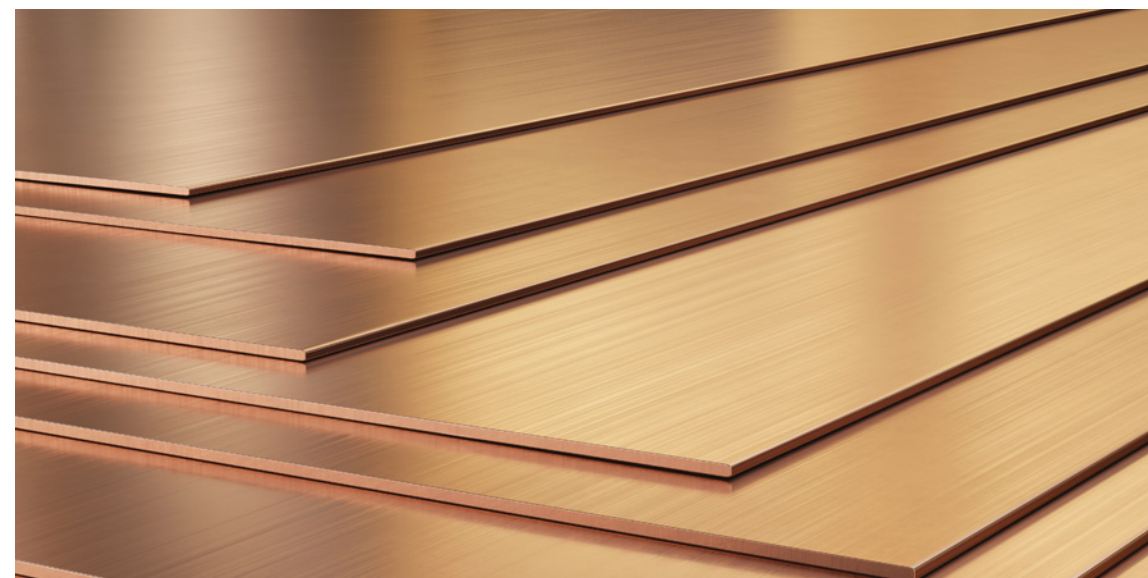

ITEM	WIDTH X LENGTH	THICKNESS
Dimension Details	600 mm x 600 mm	3 mm - 6 mm
	14" x 48"	0.3 mm - 3 mm
Standards	IS 1897   IS 3052	

# Copper Wire Rod


Copper Wire Rod - OFC & ETP Grade



ITEM	OFC Grade	ETP Grade
<b>Dimension Details</b>	0.8 mm	0.8 mm
<b>Specifications</b>	Cu : 99.95%, O2 : < 10 ppm	Cu : 99.90%, O2 : < 400 ppm
<b>Supply Condition</b>	In Bobbins   Coils	In Bobbins   Coils
<b>Coil Weight</b>	1.5 to 3.0 MT	1.5 to 3.0 MT

# Copper Wires

Copper Wire EC Grade

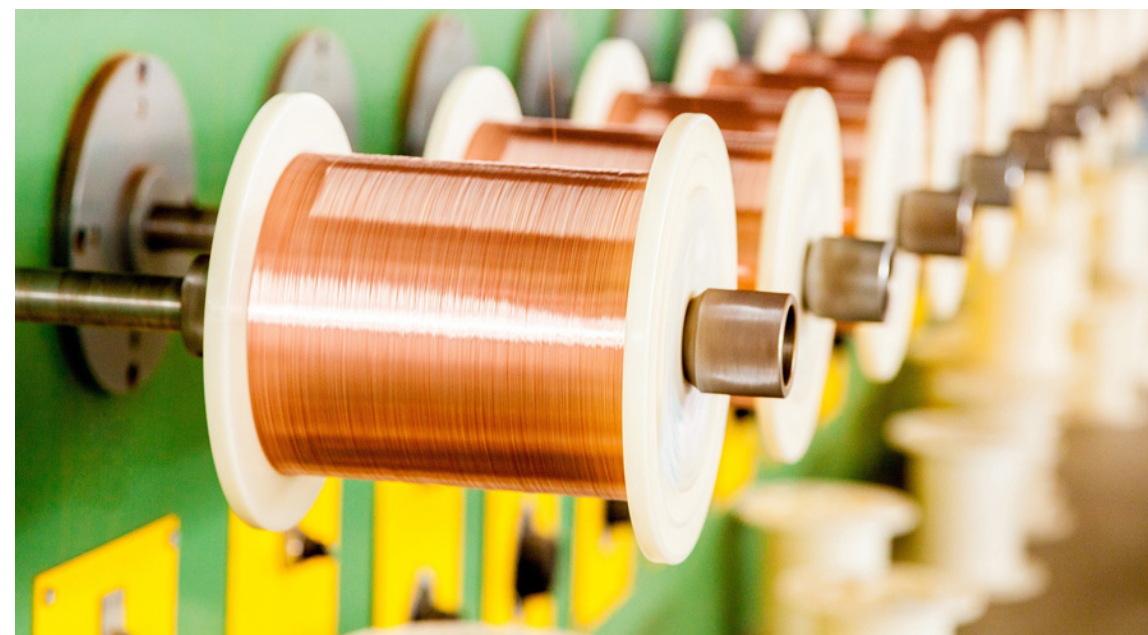

ITEM	
<b>Dimension Details</b>	0.193 mm - Dia. 6.0 mm
<b>Supply Condition</b>	In Reels   Bundles
<b>Coil Weight</b>	5 Kgs. - 100 Kgs.

# Copper Sections & Profiles



ITEM	
<b>Standards</b>	IS : 191, 613 & 1897, BS EN 13601 : 2013
<b>Configuration</b>	Customised as per requirements

# Copper Tubes & Pipes



## ITEM

<b>Dimension Details</b>	OD - 10 mm - 100 mm   ID - 1 mm - 10 mm
<b>Specifications</b>	Electrolytic Grade
<b>Standards</b>	IS 2501

# Copper Conductors

Copper Conductors



## ITEM

<b>Dimension Details</b>	0 20 sq. mm to 0 300 Sq. mm
<b>Configuration</b>	Customised as per requirements

# Copper PICC

Paper Insulated Copper Conductors



## Dimension Details

	Width	Thickness
<b>Size Range</b>	25 mm max	1 mm - 6 mm
<b>Supply Condition</b>	Wooden Reels	
<b>Coil Weight</b>	20 Kgs - 100 Kgs	
<b>Paper Type</b>	Craft Paper, Nomex etc	